


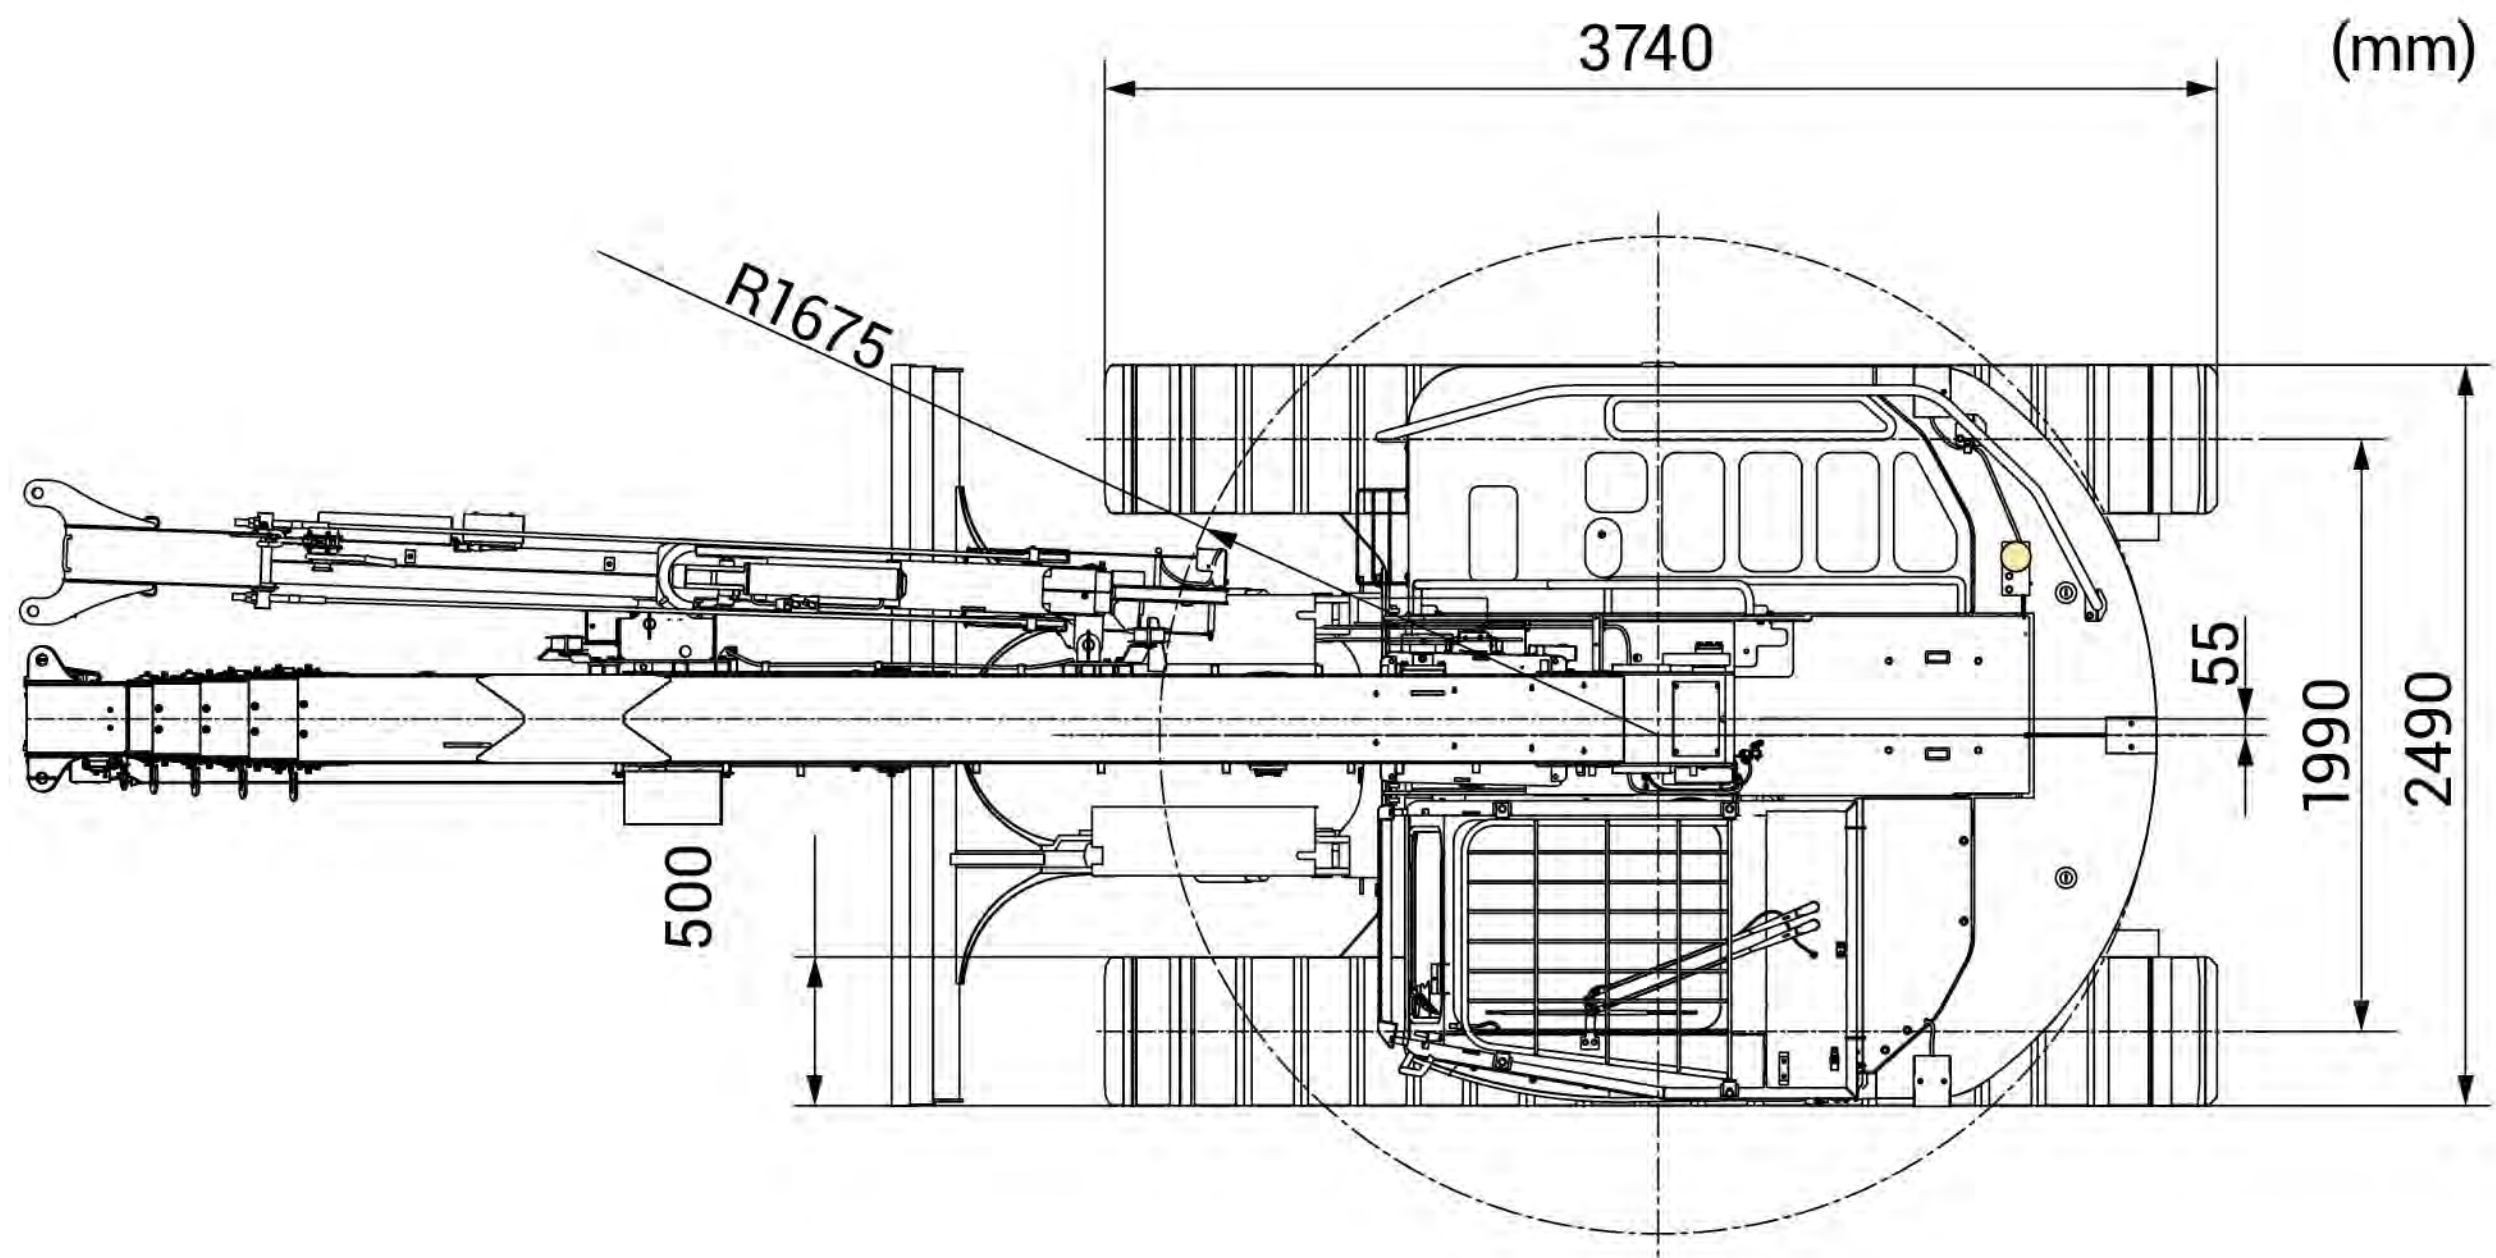


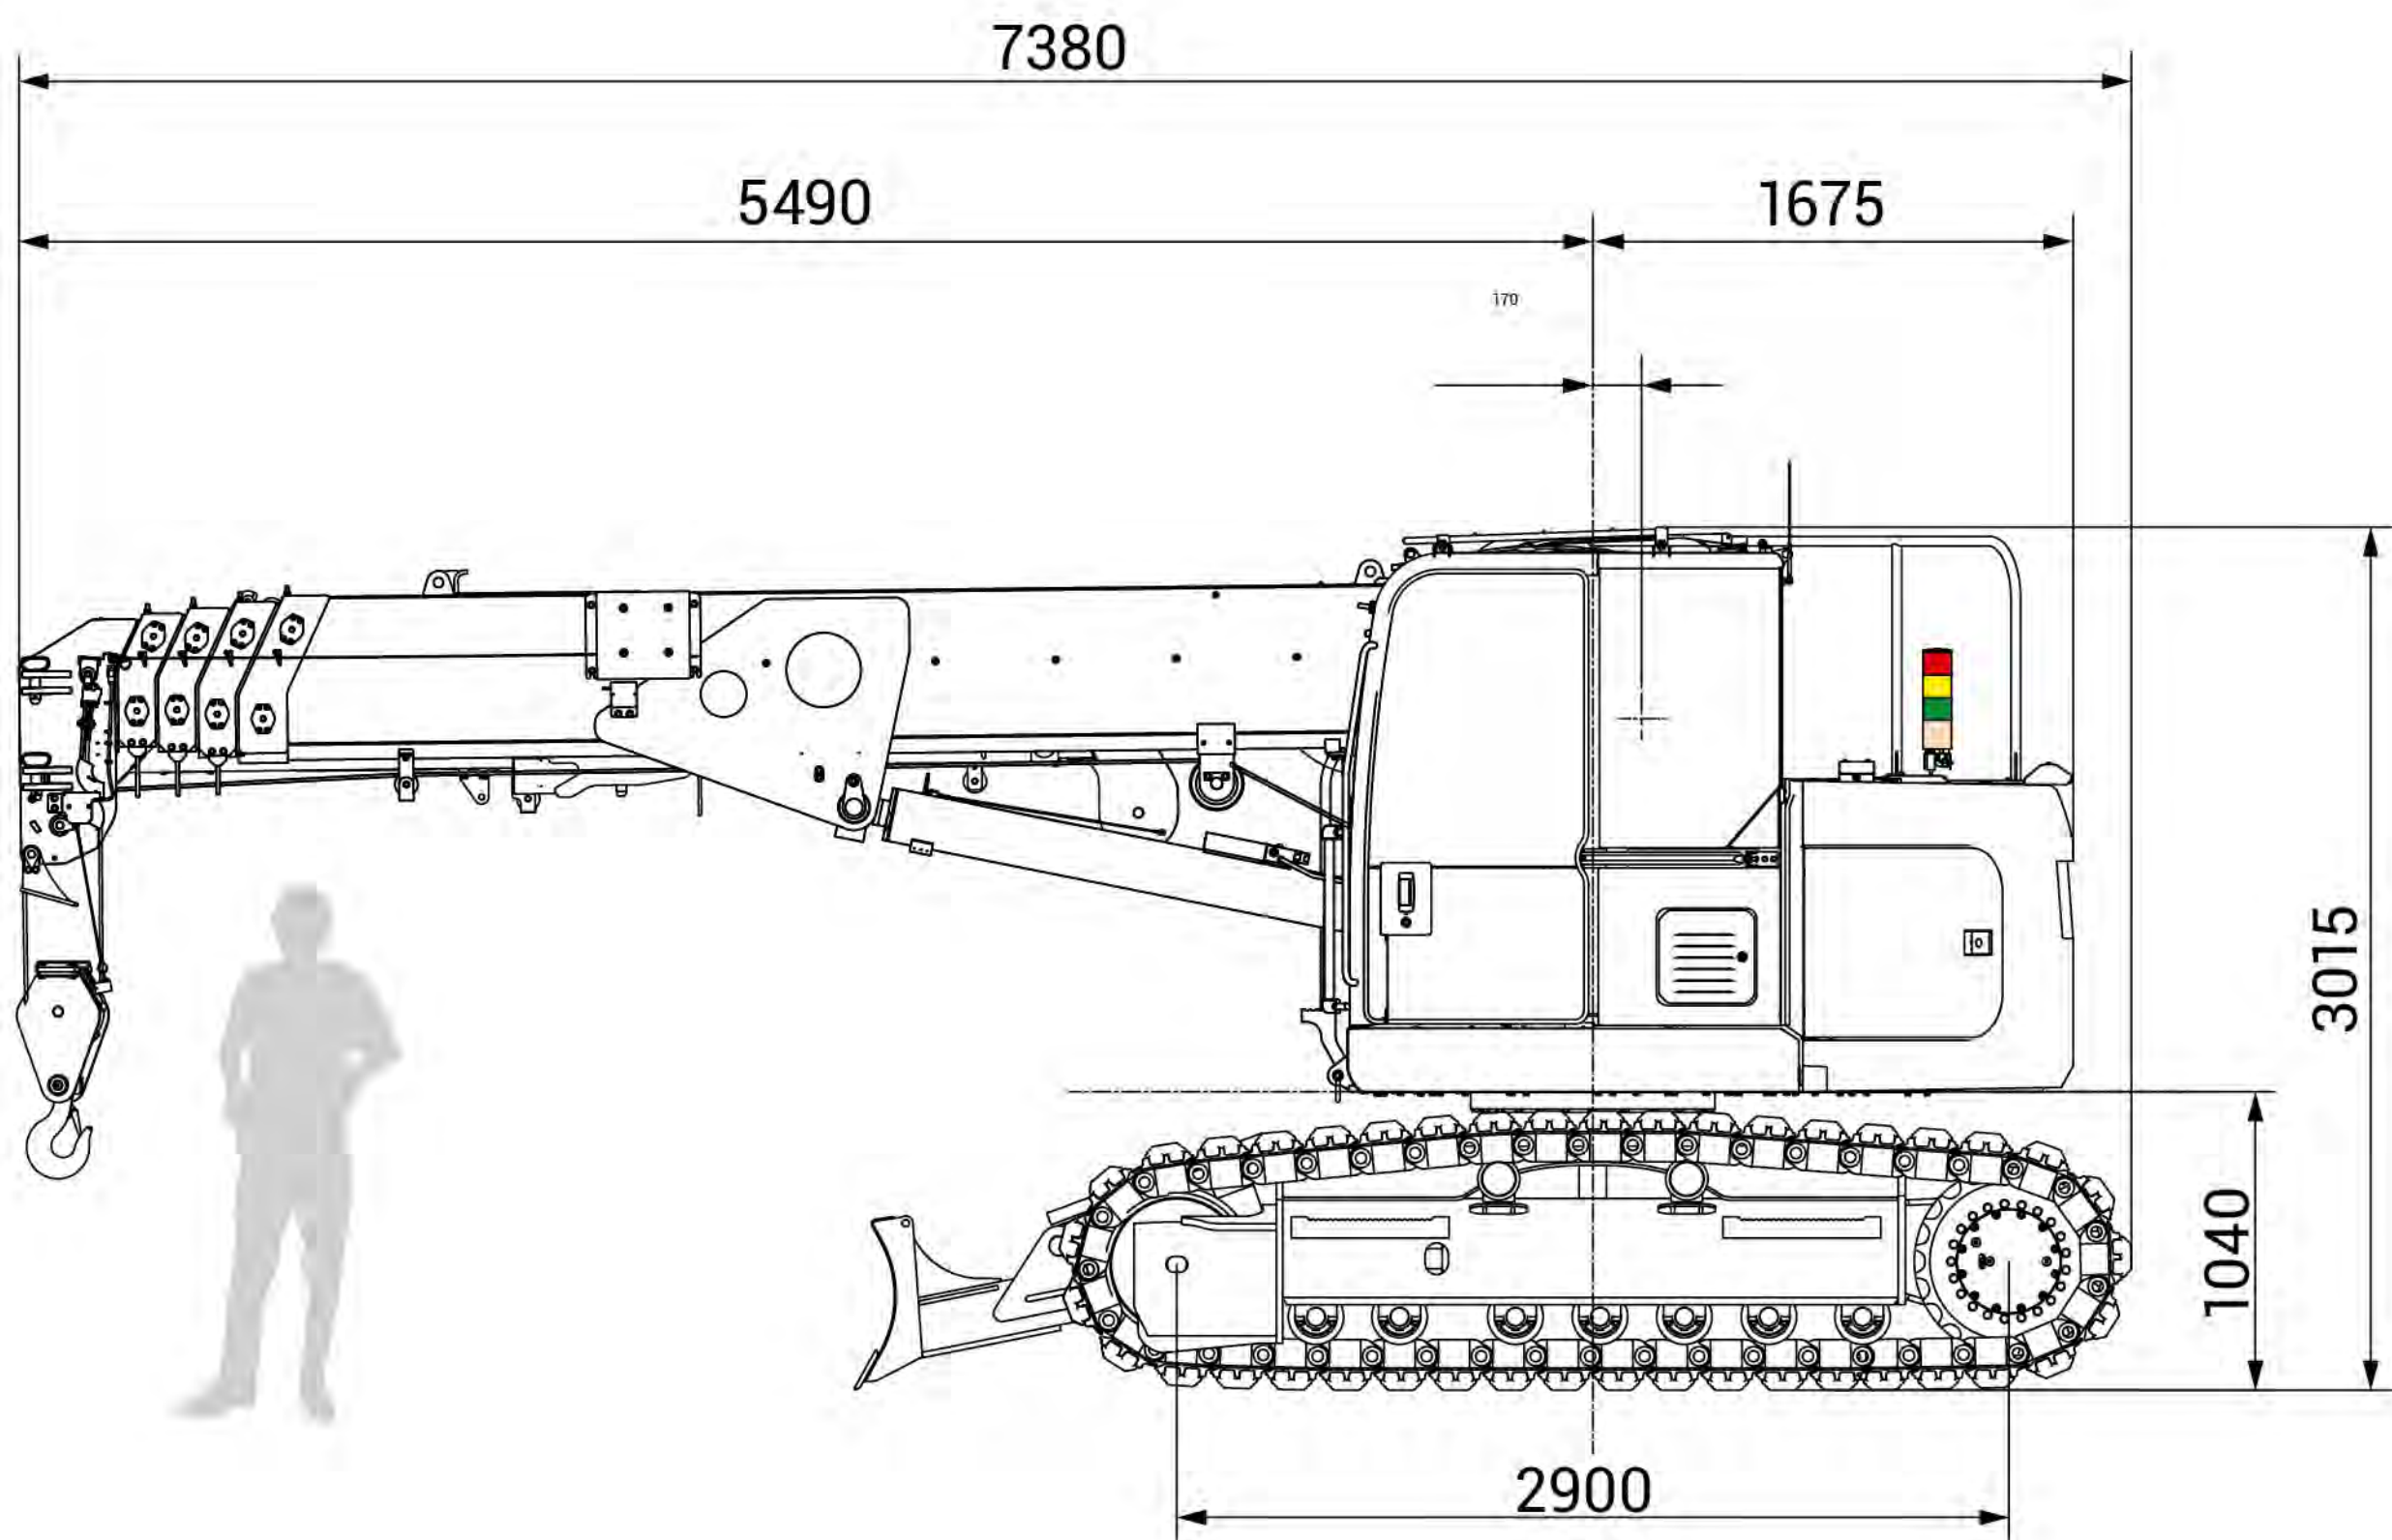


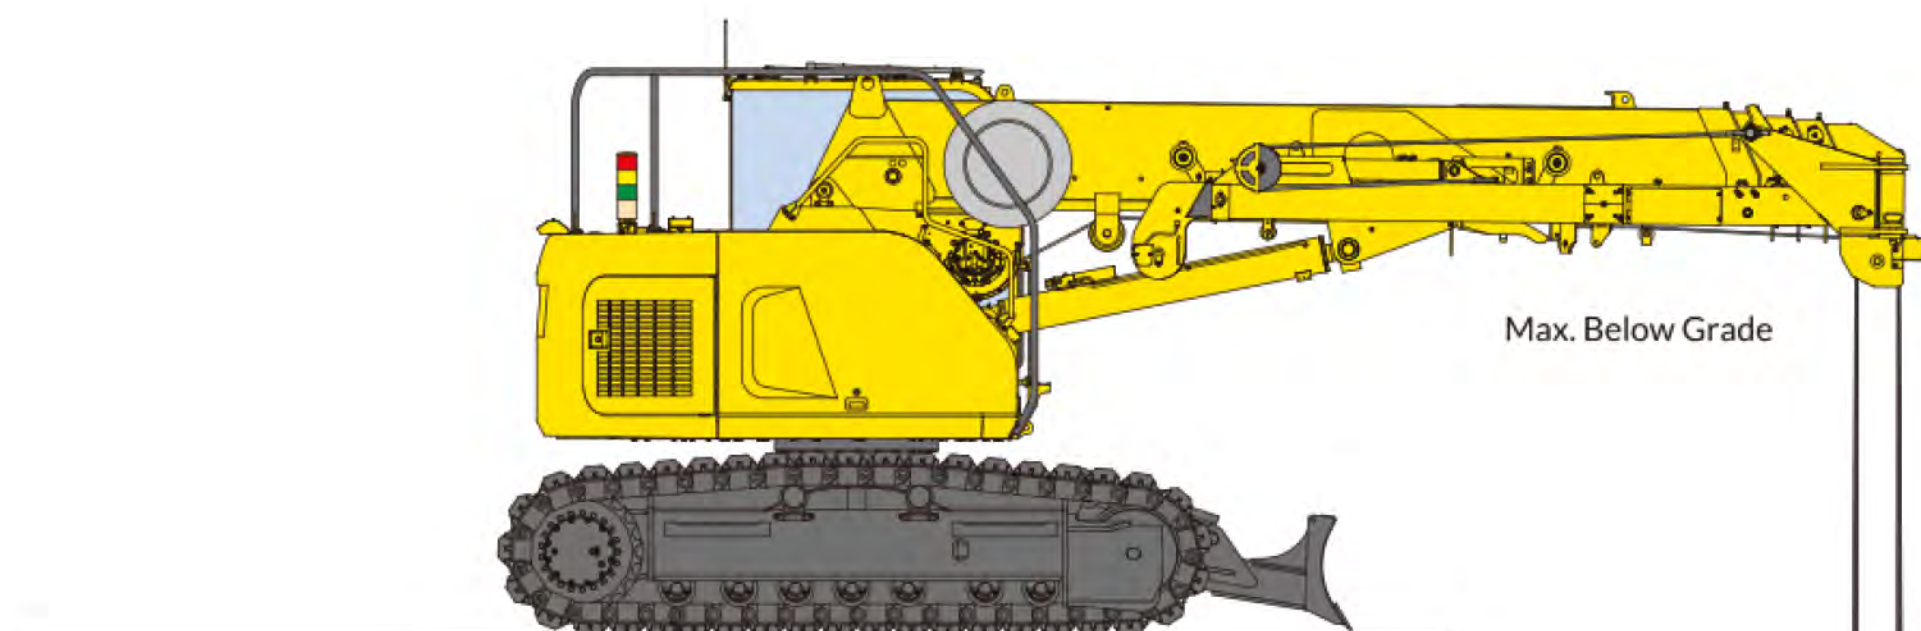

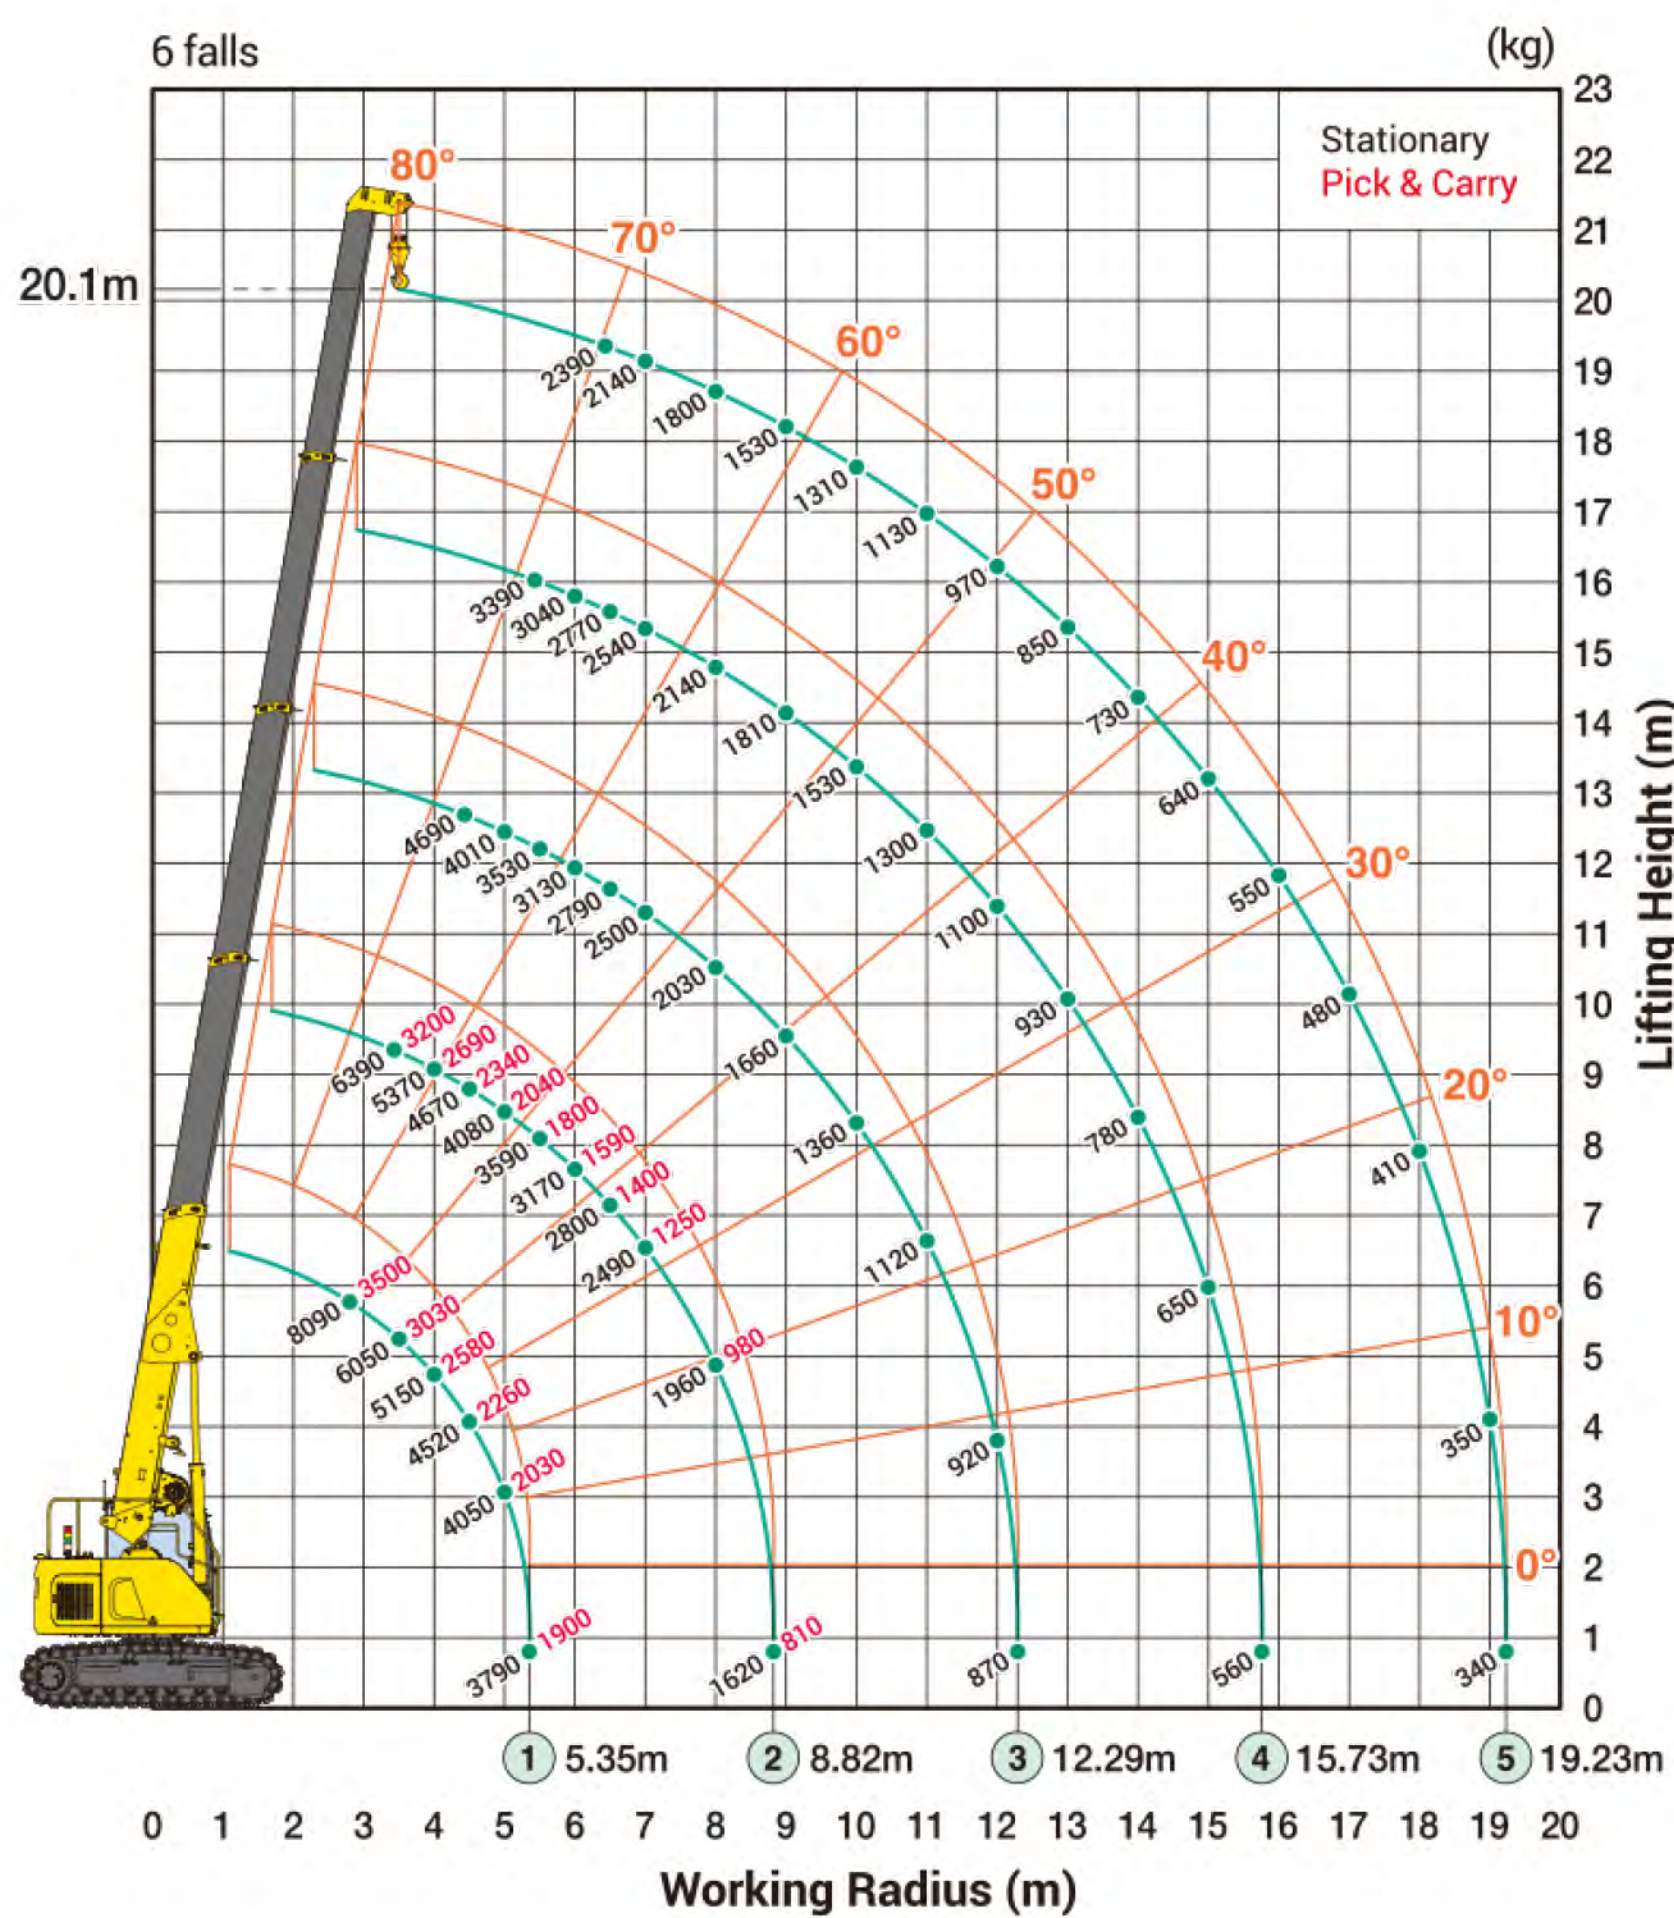

- 6 Fall 23.2m
- 4 Fall 35.8m
- 2 Fall 73.2m
- Single Fall 148.8m

Working Range Chart for Fly Jib (Single fall)

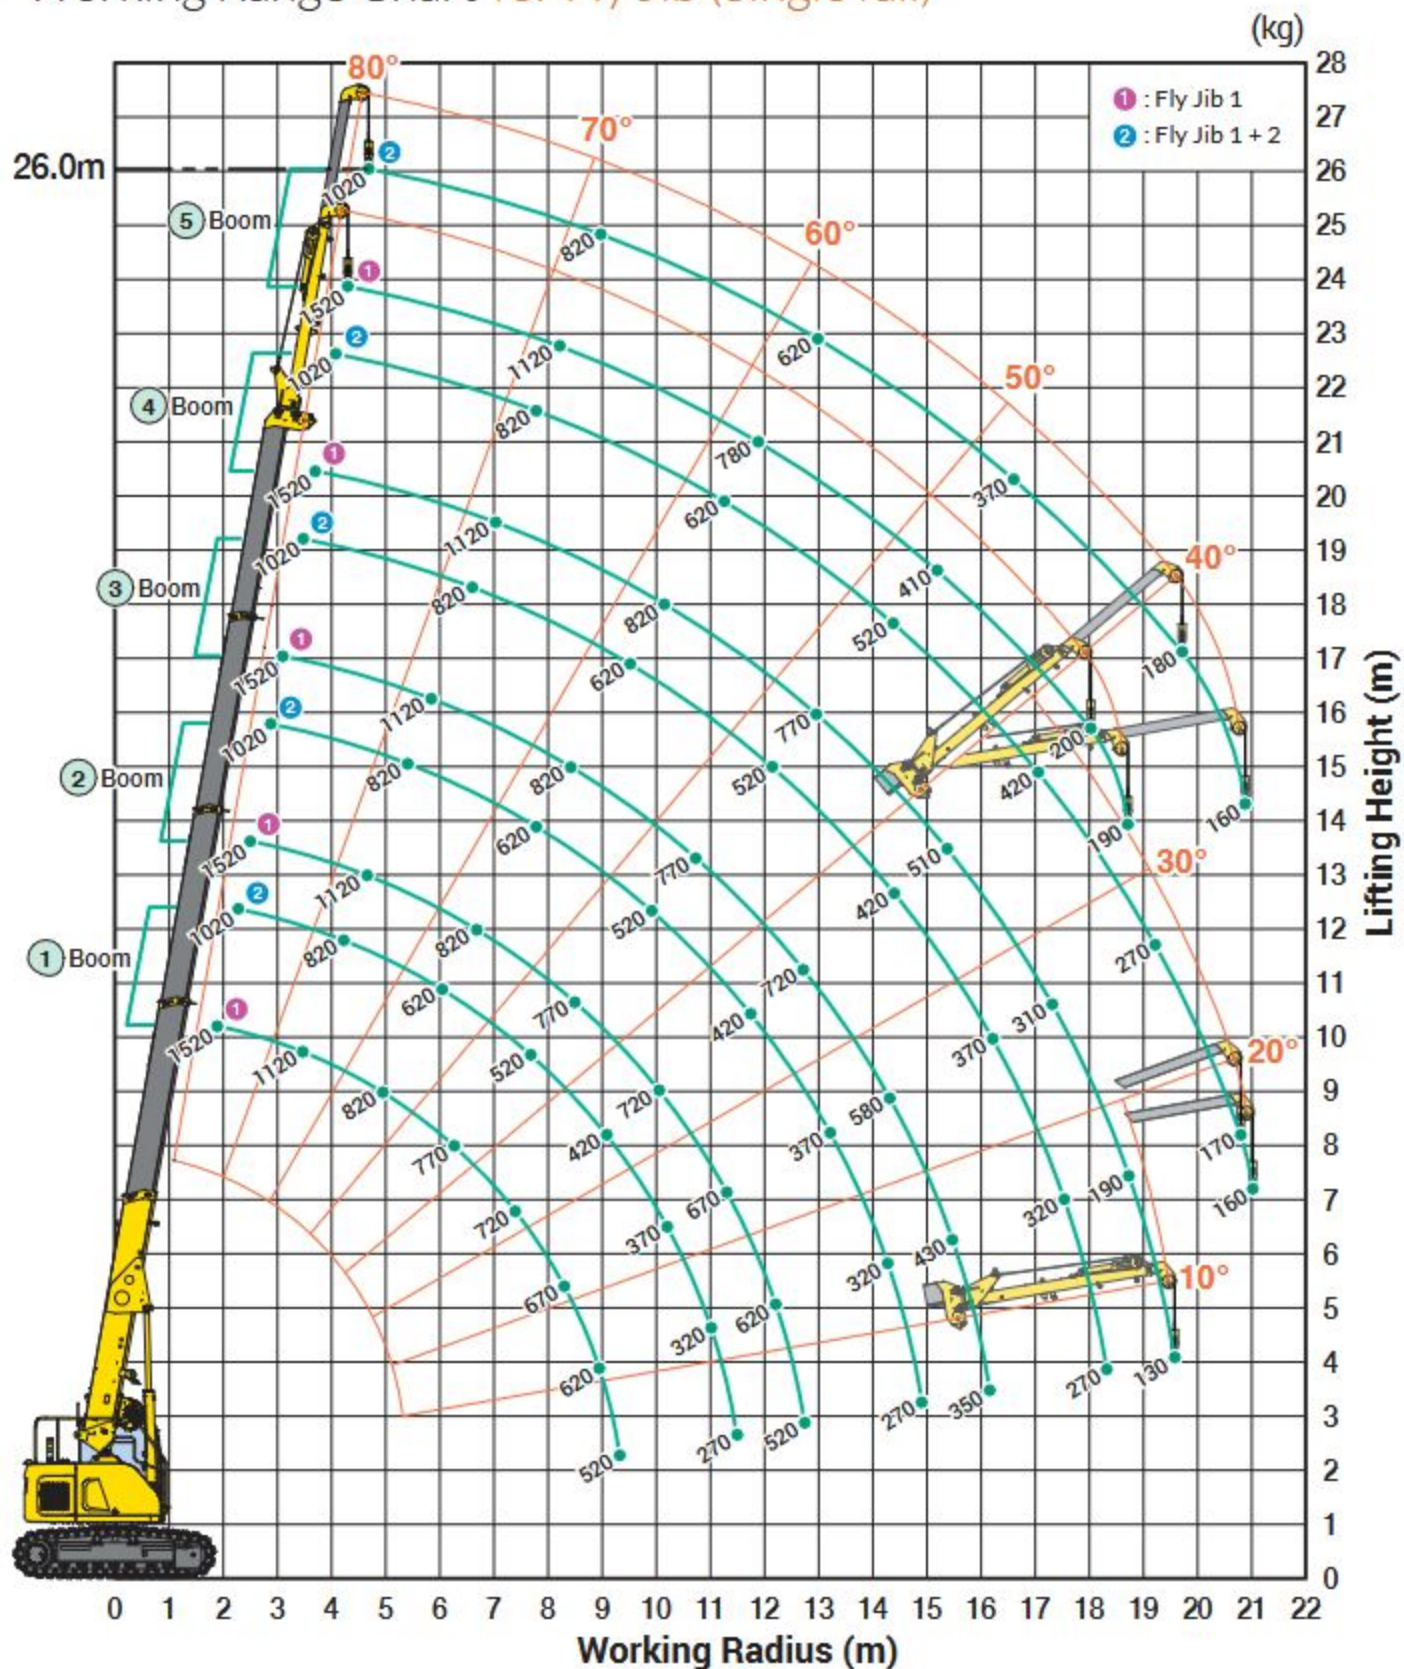

Rated Total Load Chart for Fly Jib

unit: kg

Main Boom Length 19.40m														
Main boom Angle	Fly Jib Length ① 3.7m							Fly Jib Length ② 5.9m						
	0°	10°	20°	30°	40°	50°	60°	0°	10°	20°	30°	40°	50°	60°
80°	1520	1120	820	770	720	670	620	1020	820	620	520	420	370	320
70°	1120	820	770	720	670	620	520	820	620	520	420	370	320	270
60°	780	740	710	670	620	520		620	520	420	370	320	270	
50°	410	400	380	380	370			370	350	330	300	270		
40°	200	200	190	190				180	170	160	160			

Main Boom Length 15.93m														
Main boom Angle	Fly Jib Length ① 3.7m							Fly Jib Length ② 5.9m						
	0°	10°	20°	30°	40°	50°	60°	0°	10°	20°	30°	40°	50°	60°
80°	1520	1120	820	770	720	670	620	1020	820	620	520	420	370	320
70°	1120	820	770	720	670	620	520	820	620	520	420	370	320	270
60°	820	770	720	670	620	520		620	520	420	370	320	270	
50°	770	720	670	620	520			520	420	370	320	270		
40°	510	500	490	480				420	370	320	270			
30°	310	310	300					270	270	260				
20°	190	190						170	160					
10°	130													

Main Boom Length 12.46m														
Main boom Angle	Fly Jib Length ① 3.7m							Fly Jib Length ② 5.9m						
	0°	10°	20°	30°	40°	50°	60°	0°	10°	20°	30°	40°	50°	60°
80°	1520	1120	820	770	720	670	620	1020	820	620	520	420	370	320
70°	1120	820	770	720	670	620	520	820	620	520	420	370	320	270
60°	820	770	720	670	620	520		620	520	420	370	320	270	
50°	770	720	670	620	520			520	420	370	320	270		
40°	720	670	620	520				420	370	320	270			
30°	580	560	520					370	320	270				
20°	430	420						320	270					
10°	350							270						

Main Boom Length 5.52m, 8.99m														
Main boom Angle	Fly Jib Length ① 3.7m							Fly Jib Length ② 5.9m						
	0°	10°	20°	30°	40°	50°	60°	0°	10°	20°	30°	40°	50°	60°
80°	1520	1120	820	770	720	670	620	1020	820	620	520	420	370	320
70°	1120	820	770	720	670	620	520	820	620	520	420	370	320	270
60°	820	770	720	670	620	520		620	520	420	370	320	270	
50°	770	720	670	620	520			520	420	370	320	270		
40°	720	670	620	520				420	370	320	270			
30°	670	620	520					370	320	270				
20°	620	520						320	270					
10°	520							270						

*The Rated Total Load Chart is based on the actual working radius including boom and jib deflection.

*The weight of the ball hook (20kg) must be included as part of the load shown in the Rated Total Load Chart.